



## **Artificial Intelligence: application of swarms' particles to determine the environmental quality in the Macheta River Watershed (Cundinamarca, Colombia)**

**Rodríguez Miranda Juan Pablo<sup>1</sup>; García Ubaque Cesar Augusto<sup>2\*</sup>; Sánchez Céspedes Juan Manuel<sup>3</sup>**

<sup>1</sup> Sanitary and Environmental Engineering. Magister in Environmental Engineering. PhD (Candidate) Full Professor. Francisco Jose de Caldas District University. Director of the AQUAFORMAT research group. Postal Address: Carrera 5 Este No 15 - 82. Avenida Circunvalar Venado de Oro. Bogotá DC Colombia.

<sup>2</sup> Civil Engineer. Doctor of Engineering. Associate professor. Francisco Jose de Caldas District University. Director of research group GIICUD, Colombia.

<sup>3</sup> Electronic Engineer. Magister in Administration. GIIRA Research Group. Assistant teacher. Francisco Jose de Caldas District University, Colombia.

**Abstract :** This paper considers artificial intelligence as an important tool for determining the concurrent environmental quality in the River Basin Machetá, able to integrate the varying water quality (BOD, TSS, N-NO<sub>2</sub> and P<sub>total</sub>) and precipitation in a collaborative model, using the artificial intelligence swarm of particles technique to emulate the assessment performed by a group of experts.

**Key Words :** Swarm particles, watershed, environmental quality.

### **Introduction**

It is an artificial intelligence technique inspired by the social behavior of groups of individuals or insects such as insect swarms which transmits the event of each individual to the other individuals of the group, generating a synergistic and therefore the location of food or a special place, that is, the population of individuals is the swarm and each individual is a particle, flying over the decision space or hyperspace of the problem, looking for optimal solutions or classified as swarm intelligence [1,2,3]. It is an adaptive method of particles or agents that move in the decision space, uses the principles of evaluation (stimulus to evaluate, distinguish characteristics), comparison and imitation (acquisition and maintenance of mental abilities) [4]. Also, it is used to solve nonlinear and multidimensional optimization problems, which imitate natural evolution through collective behavior or emerging intelligence, which germinates in a population. The expression can be set as [5,6,7]: Each particle in the decision space  $N$ , knows its position,  $X_i = [x_{i1}, x_{i2}, \dots, x_{iN}]$ , then has a speed  $V_i = [v_{i1}, v_{i2}, \dots, v_{iN}]$ , the best position is  $P_i = [p_{i1}, p_{i2}, \dots, p_{iN}]$  and the best position found within the swarm is  $G = [g_{i1}, g_{i2}, \dots, g_{iN}]$ . This technique has applications in predicting in real-time, the state of rivers, forecasts of river levels, water supply, convergence rates in optimizing environmental problems, laminar and turbulent flow analysis [8,9,10]. Therefore, in this work the environmental quality in the Machetá River basin (Cundinamarca, Colombia) will be assessed using the swarm of particles technique.

Other investigations that have used the particle swarm technique is that of [11], this research applied Particle Swarm technique (PSO) for water allocation in Zhoukou, the result obtained was the optimization of the allocation of water resources in the planning years, from 2015 to 2025 under the 50% guarantee rate. Regarding to undertaken works to assess the environmental quality using particle swarm is that made by [12], in this work PSO was used to optimize the assessment model environmental quality of Qinhuangdao which used a neural network Back Propagation in which the PSO used to optimize the initialized weights of the BP neural network, and then based on the optimized result, the BP neural network was used for an additional optimization, which made the model faster and more accurate. Finally, there is a research by [13], which proposed a new prediction model for predicting the quality of effluent water from a process of wastewater treatment, in which they took ASM2 model to mimic the treatment process, and the PSO algorithm to adjust the parameters of the model, the results obtained showed that the new model simulates the behavior of wastewater treatment efficiently with high precision and accuracy.

Additionally, the study [14], justifies the implementation of new techniques such as PSO. The study consisted of analyzing different researches in which quantitative models such as neural network, diffuse logic, genetic algorithms, integrated models, etc., using different parameters to determine water quality have been applied; In the future, it was necessary to use hybrid methods of these approaches with new optimization techniques, namely genetic algorithm (GA), optimization of particle swarm (PSO) and optimization of ant colony to improve the quality of the selection of features and also to obtain better classification accuracy.

## Materials and Methods

The method used is a combination of real and exact observation and knowledge of an empirical, complex situation and inductive reasoning, which would be to derive a new knowledge from particular phenomena and knowledge already obtained, and to establish propositions analyzed from their causes and real effects, i.e. from the particular to the general [15,16]. It should be mention that according to the analysis and scope of the results, the type of research is analytical - quasi experimental, since it analyzes an event and understands it in terms of its obvious aspects, and also discovers elements that make up the totality and connections explaining their integration, i.e., promotes the study and deeper understanding of the event under study [17,18,19].

Precipitation information was obtained from the weather stations of the Cundinamarca Autonomous Regional Corporation (CAR) located in each of the municipalities belonging to the Macheta river basin; information water quality parameters BOD, TSS, N-NO<sub>2</sub> and P<sub>total</sub>, as for surface water quality as plants wastewater treatment (including treatment flow) located in towns in to the basin in question, were taken from the Environmental Laboratory of the Cundinamarca Autonomous Regional Corporation (CAR).

## Results

For the environmental quality data of the surface water body, using particle swarms, this technique allows optimizing the analysis of the problem, by abstracting possible solutions called particles, you are moving in the search space according to their position and speed. The theoretical basis for this is to make the particle cloud converge quickly to the best solutions. This technique acts as an optimizer, finding the best solution from already defined patterns, but does not allow from certain input variable data to calculate or estimate an output value. This is why it is usually used as an optimizer in neural networks, understood as a training method for the network.

For this particular case of environmental quality in the river basin, it is initially proposed to collect information, create the neural network, configure it by initializing the weights, and then train it through a particle swarm (PSO) based algorithm. This algorithm depends entirely on a social behavior of the swarm, where each particle explores its new position depending on its past location and the best location within the swarm, updating the position and velocity of the particles, as shown in the following equation:  $v_k^{t+1} = w^t v_k^t + c_1 r_1 (pbest_k - x_k^t) + c_2 r_2 (gbest_k - x_k^t)$ ;  $x_k^{t+1} = x_k^t + v_k^t$ , where,  $v_k^t$  y  $x_k^t$  represent the velocity and position of the particle k, at time t respectively,  $c_1$  and  $c_2$ , are accelerated factors,  $r_1$  and  $r_2$ , are random values between 0 and 1, pbest is the best position of the particle and gbest is the best particle within the swarm. When using particle swarms, we obtain what is observed in Figure 1.

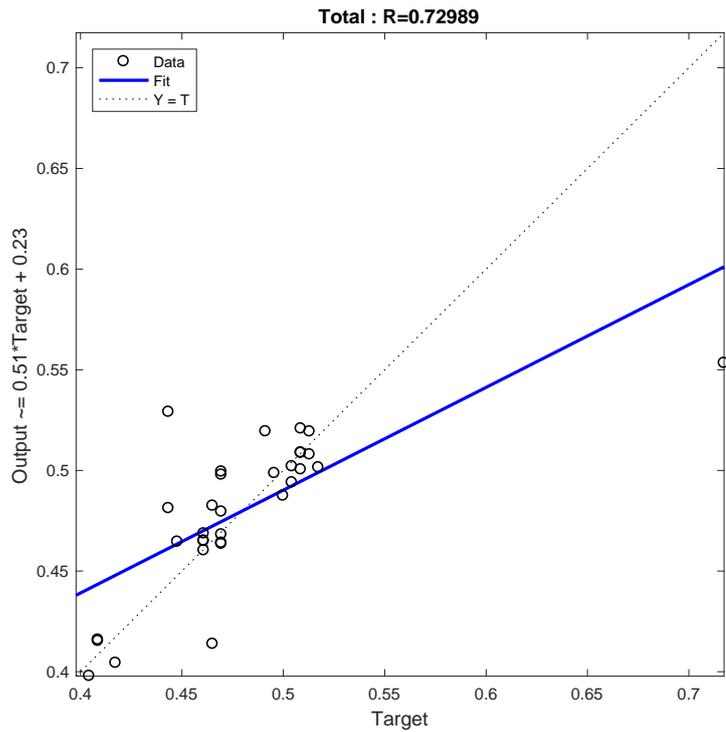


Figure 1. Lineal Regression for environmental quality.

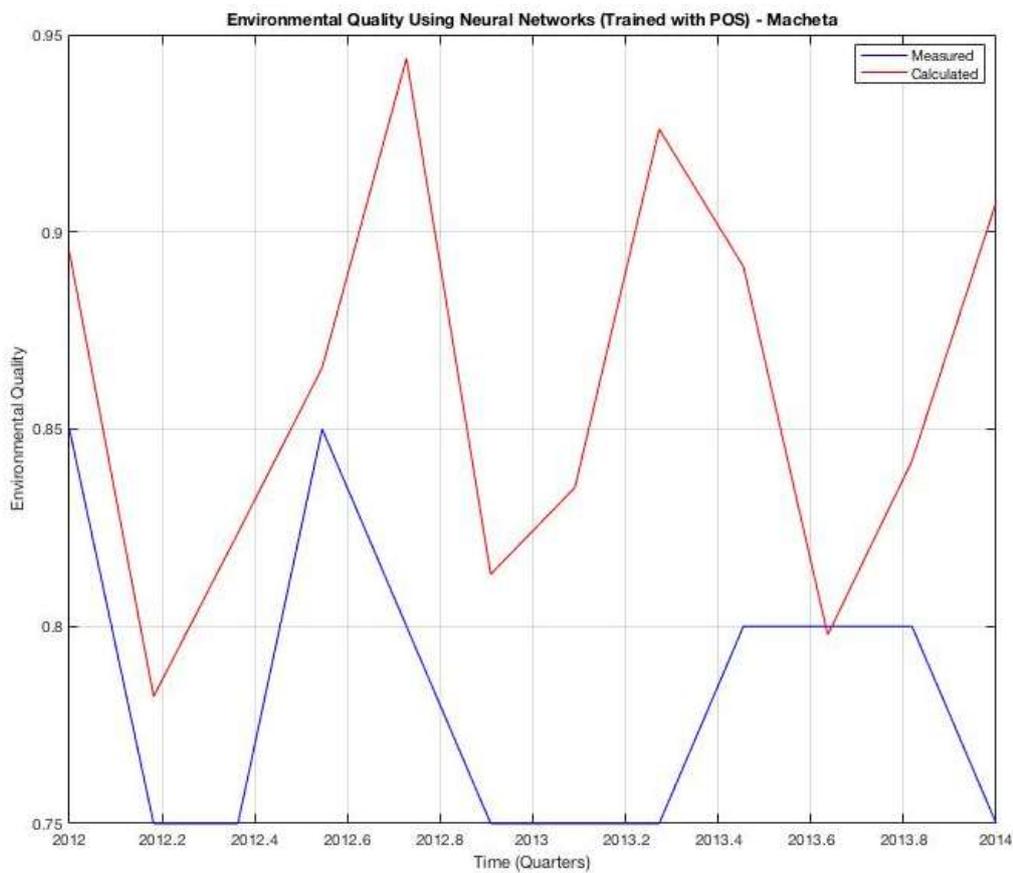


Figure 2. Comparison between the calculated and the expert environmental quality.

Figure 1 shows a mean representativeness of the degree of reliability or goodness of fit of the model analyzed in the data structure; in addition, the analyzed data traffic generates a good test determination coefficient, i.e., it is the explanation of the proportion of the environmental quality variable calculated with swarm of particles and the measured environmental quality (experts) for this river, which present several points of dispersion among themselves in the cloud of data analyzed in the period 2012-2014.

In figure 2, it is observe how the line entities is the indicator of the environmental quality measured (experts). It is a volatile fluctuation with a recurrent frequency in the analyzed period (2012 - 2014), with a high dispersion of the results of environmental quality for the body of surface water between the measured (Expert) and calculated (PSO). As for the calculated (PSO), the ranges of values of environmental quality are between 0.75 to 0.95 i.e., with very good qualification; while the values of environmental quality of the experts (measured), are between 0.75 to 0.85, that is to say the qualification between good and very good, indicating a variability of the qualification of the environmental quality, to the self recovery of the body of surface water due to untreated municipal sewage discharges and in other cases by discharges from wastewater treatment plants (wastewater treatment systems) installed in municipalities that discharge their wastewater to the river.

The difference between the measured (Experts) and the calculated (PSO) would indicate that the modeling system is not ideal or it is necessary to have some other parameter different from those initially exposed. In consultation with the group of experts of the dispute, the consensus was obtained that the main variable that influences the phenomenon that was not taken explicitly in the initial model was the precipitation, since the influence of this affects the measurements of the water quality parameters (BOD, TSS, N -NO<sub>2</sub> and P<sub>total</sub>), because the precipitation helps to concentrate or dilute the contaminants analyzed in this surface water body.

**Table 1. Performance measurement of the computational technique.**

Computational Technique	Mean Squared Error (MSE)		Testing coefficient determination (R <sup>2</sup> )		Relative Error	Absolute Error
	Suggested Value	Value Obtained	Suggested Value	Value Obtained		
Swarm of particles	≤ 0.10	0.0943	□ 0.90	0.7299	9.8677%	0.0773

In Table 1, it is observed that the obtained results of environmental quality when applying swarm of particles to emulate the results of environmental quality conceived by the experts in this body of surface water, shows favorable values in terms of the mean square error, relative error and the absolute error, compared with the literature; however when comparing the values obtained by applying the technique versus those suggested, it is evident that the coefficient R<sup>2</sup> is outside the suggested range. Therefore, the proposed model serves as a tool for the analysis of the quality of surface bodies but should not be used as a sole criterion to determine the quality of water and makes it necessary to use the concept emitted by experts for environmental making decision.

## Conclusions

When using swarm of particles as an optimizer to estimate the environmental quality in the body of surface water, we observe an artificial neural network configuration with five layers, population and velocity of the particles, a training layer and the result is suitable in the emulation of the environmental quality of the experts according to the performance results, but they are not enough for the environmental making decision, for which the expert concept is necessary for assertive making decisions. When comparing the measured (expert) and calculated (PSO) results, it presents a combined topology in the segments of observation that converge in a marked heterogeneity and high variability of the environmental quality results, which establishes to condition the precipitation variable as influential in the phenomenon of concentrating or diluting the contaminants analyzed in this body of surface water.

## Acknowledgements

The authors are grateful to the Francisco José de Caldas District University (Bogotá, Colombia) Engineering Doctorate Program, the Cundinamarca Autonomous Regional Corporation (CAR) and the Hydrology, Meteorology and Environmental Studies Institute (IDEAM) for the information provided for the analyzed Basin.

## References

1. P. Novoa, "Técnicas avanzadas de optimización en ambientes dinámicos," Granada, España, 2013.
2. A. Hinojosa, "El método de enjambre de partículas y el criterio de mínima entropía en el diseño óptimo de un dissipador de calor," *Ingenierías, Universidad de Medellín.* , pp. Volumen 11, Numero 20, pp 203-213, 2012.
3. J. Gonzalez, "Diseño de relajadores de campo eléctrico usando optimización por enjambre de partículas y el método de elementos finitos," *Tecnológicas*, pp. Volumen 20, Numero 38, pp 27 - 39, 2017.
4. S. De los Cobos, "Colonia de abejas artificiales y optimización por enjambre de partículas para la estimación de parámetros de regresión no lineal," *Revista de matematica: teoria y aplicaciones.* , pp. Volumen 21, numero 1, pp 107 - 126, 2014.
5. J. Lima, "Optimización de Enjambre de Partículas aplicada al Problema del Cajero Viajante Bi-objetivo," *Revista iberoamericana de inteligencia artificial*, pp. Volumen 32, pp 67-76, 2006.
6. F. Alonso, "Application of Intelligent Algorithms to Aerospace Problems ," Madrid, España, 2011.
7. L. Bermeo, "Estimation of the particle size distribution of colloids from multiangle dynamic light scattering measurements with particle swarm optimization," *INGENIERÍA E INVESTIGACIÓN*, pp. Volumen 35, numero 1, pp 49-54, 2015.
8. V. Cuevas, "Modelo de gestión de un embalse en tiempo real durante avenidas basado en redes Bayesianas entrenadas con el metodo de optimización PLEM," Madrid, 2015.
9. G. Schweickardt, "Metaheurísticas Multiobjetivo Cardumen De Peces Artificiales Fafs) Y Optimización Evolucionaria Por Enjambre De Partículas Con Topología Estocástica Global Individual (Fepso Gist). Parte I: Antecedentes Y Desarrollos Teóricos," *Lámpsakos*, pp. Volumen 12, Julio - Diciembre, pp 13-22, 2014.
10. H. Espitia, "Revisión sobre modelos de enjambres de partículas con características de vorticidad. ," *Ingenium. Revista de la Facultad de Ingeniería*, pp. Año 17, Numero 34, pp 162-183, 2016.
11. Guo-dong Qu and Zhang-hua Lou, "Application of particle swarm algorithm in the optimal allocation of regional water resources based on immune evolutionary algorithm," *Journal of Shanghai Jiaotong University (Science)*, vol. 18, no. 5, pp. 634-640, October 2013.
12. Xiaoguo Zhou, Wenzhong Zhang, Wei Yuan, and Qingchao Liu, "The Environmental Quality Evaluation Based on BP Neural Network and PSO and Case Study," in *2008 International Symposium on Intelligent Information Technology Application Workshops*, Shanghai, 2008, pp. 32-35.
13. Li Xiaoting, Pan Feng, Gao Qi, Li Weixing, and Lian XiaoFeng, "A novel ASM2 and SVM compensation method for the effluent quality prediction model of A2O process," in *Control Conference (ASCC), 2013 9th Asian*, Istanbul, 2013.
14. Brijesh Kateriya and Ritu Tiwari, "River water quality analysis and treatment using soft computing technique: A survey," in *International Conference on Computer Communication and Informatics (ICCCI) 2016*, Coimbatore, 2016, pp. 1-6.
15. G. Vergel, *Metodología: un manual para la elaboración de proyectos de investigación*. Barranquilla.: Unicosta, 2010.
16. M Balestrini, *Cómo se elabora el proyecto de investigación*. Caracas, Venezuela: BL Consultores asociados, 2001.
17. Hurtado J., *Metodología de la investigación holística*. Caracas: Fundación SYPAL, 2000.
18. Vergel G., *Metodología. Un manual para la elaboración de diseños y proyectos de investigación. Compilación y ampliación temática*. Barranquilla: Publicaciones Corporación UNICOSTA, 2010.
19. R. Hernández, *Metodología de la investigación*.. México: Mc Graw Hill, 2010.
20. IM Babea, "El problema del agua y la inteligencia artificial," Madrid, España, 2010.
21. West D, "An empirical analysis of neural network memory structures for basin water quality forecasting," *International Journal of Forecasting*, pp. 777-803, 2011.

22. Hong Y.S, "Analysis, Analysis of a municipal wastewater treatment plant using a neural network-based pattern," *Water Research*, pp. 1608–1618, 2003.
23. J. Creswell, *Qualitative inquiry & research design: choosign among five approaches.*. UK: SAGE publications, 2007.
24. M. Firat, "River flow estimation using adaptive neuro fuzzy inference system," *Mathematics and Computers in Simulation*, pp. Volumen 75, pp 87-96, 2007.
25. MC. Escobar, "DIseño de un sistema experto para la reutilización de aguas residuales," *Ciencia e ingeniería neogranadina*, pp. Volumen 26, numero 2, pp 21- 34, 2016.
26. NA Gómez, *Sistemas Bio-Inspirados: un marco teórico para la ingeniería de sistemas complejos.* Bogotá: Editorial Universidad del Rosario, 2011.
27. P Ponce, *Inteligencia artificial con aplicaciones a la ingeniería.* Mexico: Alfaomega, 2010.
28. E. Calderón, "Desarrollo de un sistema de control neuro difuso de la distribución de agua en un tramo de un canal principal de riego. ," Lima, Perú, 2014.
29. M. Zarghami, "Multi-criteria decision making for integrated urban water management," *Water Resources Management*, pp. Volumen 22, numero 8, pp 1017-1029, 2007.
30. L. Carvajal, "Un modelo de gestión de la calidad y cantidad de agua con lógica difusa gris para el río Aburrá," *Ingenierias, Universidad de Medellin*, pp. Volumen 12, numero 22, pp 59-74, 2013.
31. A. Szesz, "Embedded system in Arduino platform with Fuzzy control to support the grain aeration decision," *Ciência Rural*, pp. Volumen 46, numero 11, pp 1917-1923, 2016.

\*\*\*\*\*